

of difference in the raining period between both days is about 3138 mA. It is clearly seen from Figure 5 that rain affect the generated current on solar cell. On 13 February 2011 we observed that the first rain of the day started around 8.00 LT and ended around 9.00 LT, corresponding to the high level of Ipv_d in the period of 8.00 LT to 9.00 LT. The second rain started around 9.40 LT and ended around 10.40 LT, corresponding to the high level of Ipv_d in the period of 9.40 LT to 10.40 LT. The fluctuation of the rain appeared in the period of around 11.20 LT to around 14.00 LT, corresponding to the fluctuation at the high level of Ipv_d in the period of 11.40 LT to 14.00 LT.

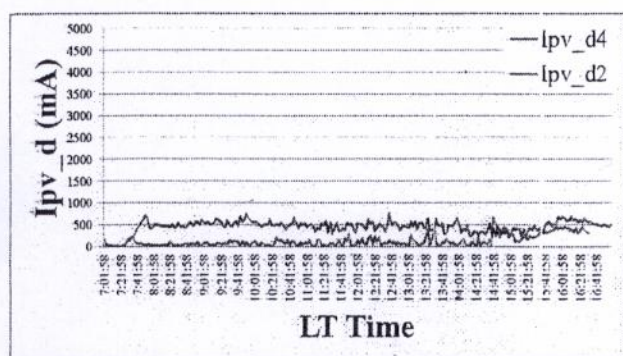


Figure 4 comparison of Ipv_d between day 2 and 4 Feb 2011.

The Ipv_d of the raining period on 13 February 2011 have high level and large fluctuation of Ipv_d in comparing with the Ipv_d of the clear sky day on 4 February 2011. It could be agreed with the fact that the sunlight can reflected and scattered by the rain drop. Then, the small intensity of the sunlight caused by the rain drop to the solar cell could reduce the current that generated by the solar cell. The Ipv_d on the clear sky day on 4 February 2011 had small fluctuation because they had no effect of the rain drop to the solar cell.

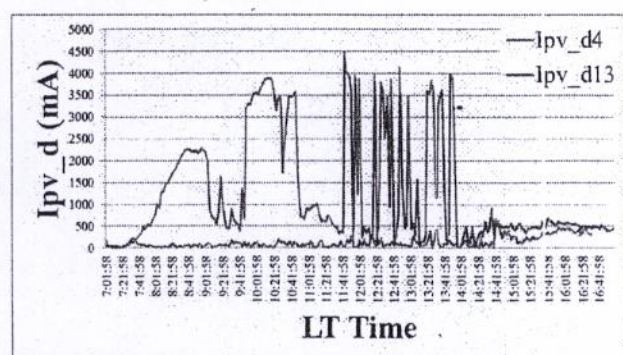


Figure 5 comparison of Ipv_d between day 4 and 13 Feb 2011.

4. CONCLUSION

Solar cell is the instrument that can convert solar energy into electric energy. The electric current occurs when the solar radiation is incident onto the Solar cell. The amounts of electric current depend on the intensity of the incident solar radiation. In daytime, the generated electric current is varied. It is caused by the varying of the intensity of the solar radiation. The variation of intensity of the incident solar radiation mainly comes from the cloud on the sky over the solar cells.

This experiment illustrated that the using of solar cell for daily weather study could be conducted. The variation

of Ipv_d might be plausible to the daily weather condition. In the period of experiment days, the variation of Ipv_d showed good agreement with the daily weather conditions. The high level with small fluctuation of Ipv_d could refer as the cloudy day without rain. Otherwise, the low level with small fluctuation of Ipv_d could refer as the sunny day. The Ipv_d with the periods of rapid changing more than 3000 mA might be considering as the day with raining periods. However, there are some developments still existed. For example, the range of the using of Ipv data was limited. The Ipv in early morning and lately afternoon are very low. That means they cannot be used to study the daily weather via the method in this experiment. We need to investigate and find the solutions in the future studies.

ACKNOWLEDGMENT

This work is support by the division of physics, faculty of Science and Technology, Rajamangala University of Technology Thanyaburi.

REFERENCES

- [1] Anderson, E. 1985. Fundamentals of solar energy conversion. MA: Addison-Wesley Pub. Co.
- [2] Kattakayam, T.n.A., Khan, S., and Srinivasan, K. 1996. Diurnal and environmental characterization of solar photovoltaic panels using a PC-AT add on plug in card. *Solar Energy Materials and Solar Cells*, 44, p25-36.
- [3] Goetzberger, A., Luther, J., and Willeke, G. 2002. Solar cells: past, present, future. *Solar Energy Materials & Solar Cells*, 74, p 1-11.
- [4] Zhong, H., Li, G., Tang, R., and Dong, W. 2011. Optical performance of inclined south-north axis three-positions tracked solar panels. *Energy*, 36, p1171-1179.
- [5] Li, Z., Liu, X., and Tang, R., 2011. Optical performance of vertical single-axis tracked solar panels. *Renewable Energy*, 36, p 64-68.
- [6] Amin, N., Lung, C. W., and Sopian, K. 2009. A practical field study of various solar cells on their performance in Malaysia. *Renewable Energy*, 34, p1939-1946.
- [7] Omubo-Pepple, V.B., Israel-Cooke, C., and Alaminokuma, G. I. 2009. Effects of Temperature, Solar Flux and Relative Humidity on the Efficient Conversion of Solar Energy to Electricity. *European Journal of Scientific Research*, 35 No.2, p.173-180.
- [8] Kawamura, H. et al. 2003. Simulation of I-V characteristics of a PV module with shaded PV cells. *Solar Energy Materials & Solar Cells*, 75, p 613-621.



9th Eco-Energy and Materials Science and Engineering Symposium

Application of Solar Cells for Daytime Weather Study

Nithiwatthn Choosakul^{a*}, Moragote Buddhakala^a, Naris Barnthip^a,
Anchan Muakngam^a and Chanoknan Banglieng^{a,*}

^a*Division of Physics, Faculty of Science and Technology, Rajamangala University of Technology Thanyaburi, Klong 6, Thanyaburi, Pathumthani 12110, Thailand*

Abstract

The electric current is generated by the solar cell when the solar radiation is incident onto the solar cell. The intensity of the incident solar radiation can control the amount of generated electric current. In daytime, the variation of intensity of the incident solar radiation mainly comes from the cloud over the solar cell. It causes the variation of generated electric current. This phenomenon serves the new way to use the solar cell for meteorological purpose. In the period of experiment days, the results showed that the variation of generated electric current might be plausible to the daily weather condition. On the sunny day, the generated current was small fluctuation and had high level. Otherwise, a small fluctuation with low level one was appear on the cloudy day. On the raining period, the generated current could drop down more than 3000 mA when compared with the sunny period.

© 2011 Published by Elsevier Ltd. Selection and/or peer-review under responsibility of CEO of Sustainable Energy System, Rajamangala University of Technology Thanyaburi (RMUTT).

Keywords: Solar cell; Weather; Cloud; Rainy day

1. Introduction

In recent year, many instruments, methods and techniques were applied to the used of solar energy. Solar cell is one of them that can use to convert the solar energy into another energy form. Generally, the solar radiation, which is incident onto the solar cell, generates the electric current [1]. The total of electricity that solar cell can produce is mainly dependent on the intensity of the incident solar radiation [2 - 5]. It is well known that there are several features affecting the performance of the solar cell such as effect of cloud and rain [6]. The generated current from solar cell is small when cloudy and rainy days.

* Corresponding author. Tel.: +66-2549-4186; fax: +66-2549-4187.
E-mail address: cnwatthn@rmutt.ac.th.

For the solar cell engineering, it is set to be “the noise” of the solar cell used. In the other hand, the reducing current one is become “the meteorological signal” for meteorological study. In this paper, we demonstrated the simply way to use of the solar cell for meteorological study. The experiment was set to study the relationship between clouds over the solar cells and the generated electric current.

2. Observations and Results

The solar cell was installed on the top of the faculty of Science and Technology building, Rajamangala University of Technology Thanyaburi where is no any shadow effect to the solar cells, as shown in Figure 1. The solar panel consists of eight solar modules, which provide the power of around 1 kW. The specification of each solar module is shown in Table 1.

Sunny Data control is a computer program. It was installed to monitor the solar cell. All of informations from the solar cell were recorded and stored automatically on a monitoring server with sampling rate of 24 data per hour. In this experiment, we designed to use the data of direct current generated by solar cell (I_{pv}) in the unit of mA. The I_{pv} was generated when the sunlight is incident onto the solar cell. [7] and [8] suggest that the amount of direct current producing from the solar panels is directly dependent on the level of light they receive. In full and bright sunlight, solar panels receive maximum levels of light. During those peak sunlight hours, the solar panel will produce the maximum current, consecutively.

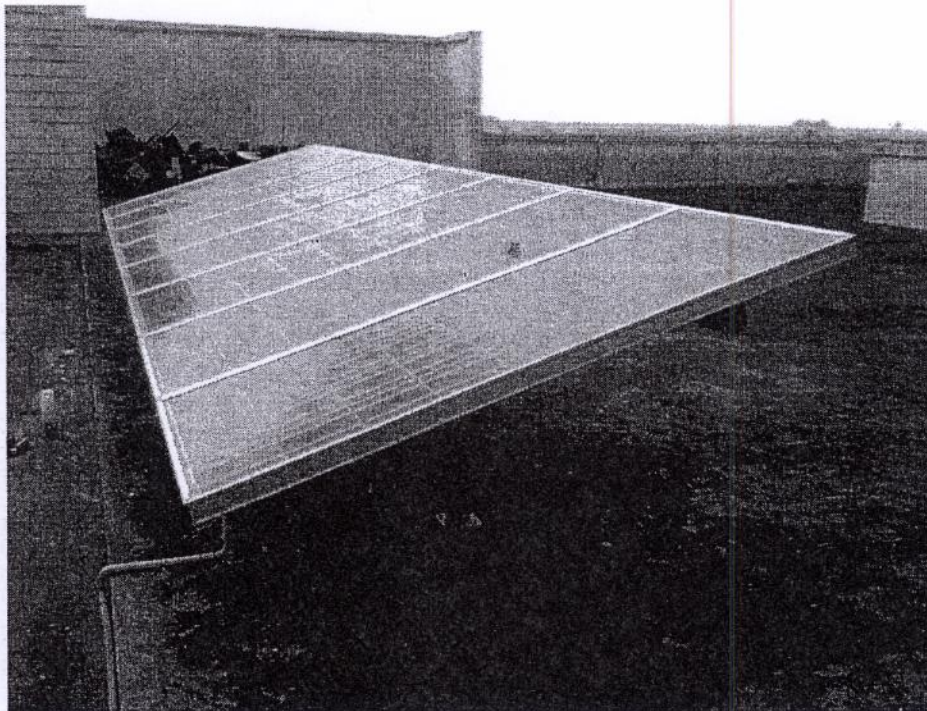
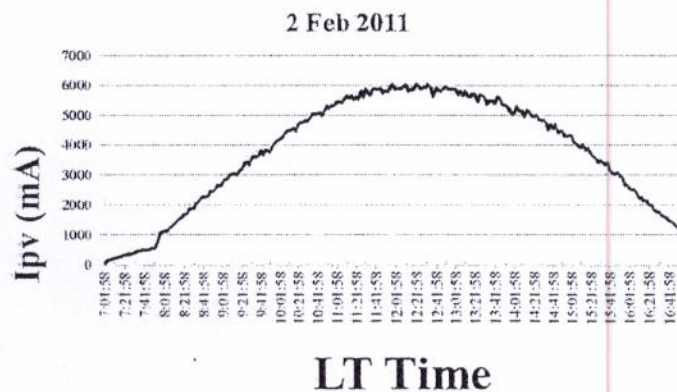


Fig. 1. The solar cell installed on the top of the faculty of Science and Technology building, Rajamangala University of Technology Thanyaburi, Thailand.

Table 1. The specification of solar module.

Solar module	Detail
Name	Sharp Solar Module ND-130T1J
Maximum Power	130.0 W
Open-circuit Voltage (Voc)	22.0 V
Short-circuit Current (Isc)	8.09A
Voltage at point of Maximum power (Vmpp)	17.4V
Current at point of Maximum power (Impp)	7.48A
Maximum system voltage	600V
Over-current protection	15A

We used the Ipv data from 1st February, 2011 to 14th February, 2011. The data of each day was started around 7.00 Local time (LT) and ended of operating time around 17.00 LT. Total observational time per day is around 10 hours corresponding to the number of data per day of 240 data. Figure 2 is an example of Ipv data in the period of operating time. It showed the Ipv of 2nd February, 2011. The Ipv slightly increased in the morning section. The maximum Ipv was about 6000 mA at around 12.10 LT. Finally, Ipv slightly decreased in the afternoon section.

Fig. 2. Ipv on 2nd February 2011.

In the period of 14 days of this experiment, we also observed the weather of each day. we found four different weather conditions: 1) The clear sky day, 2) the cloudy day without rain, 3) the cloudy day with rain, and 4) the rainy day. Table 2 shows the daily weather conditions of all 14 experimental days.

Table 2. The daily weather conditions of all 14 experimental days.

Daily weather condition	Date (Feb 2011)
1. The clear sky day	4 th and 8 th
2. The cloudy day without rain	2 nd , 3 rd , and 5 th
3. The cloudy day with rain	1 st , 6 th , 10 th , and 11 th
4. The rainy day	7 th , 9 th , 12 th , 13 th , and 14 th

At the first, Ipv of the clear sky days was used to make a reference index data (Ipv_i). The smoothing average method with 15 points of window data was applied to compute the Ipv_i . Finally, the Ipv_i data was used to create the difference Ipv_d by subtracting the Ipv_i data with daily Ipv data as shown by Equation 1 below;

$$Ipv_d = Ipv_i - Ipv \quad (1)$$

Figure 3 shows the plotted of Ipv_d of the 1st, 2nd, 4th, and 13th of February 2011. Refer to Table 2, the 1st February 2011 was under the daily weather condition 3, the 2nd February 2011 was under to daily weather condition 2, the 4th February 2011 was under to the daily weather condition 1, and the 13th February 2011 was under to the daily weather condition 4, respectively.

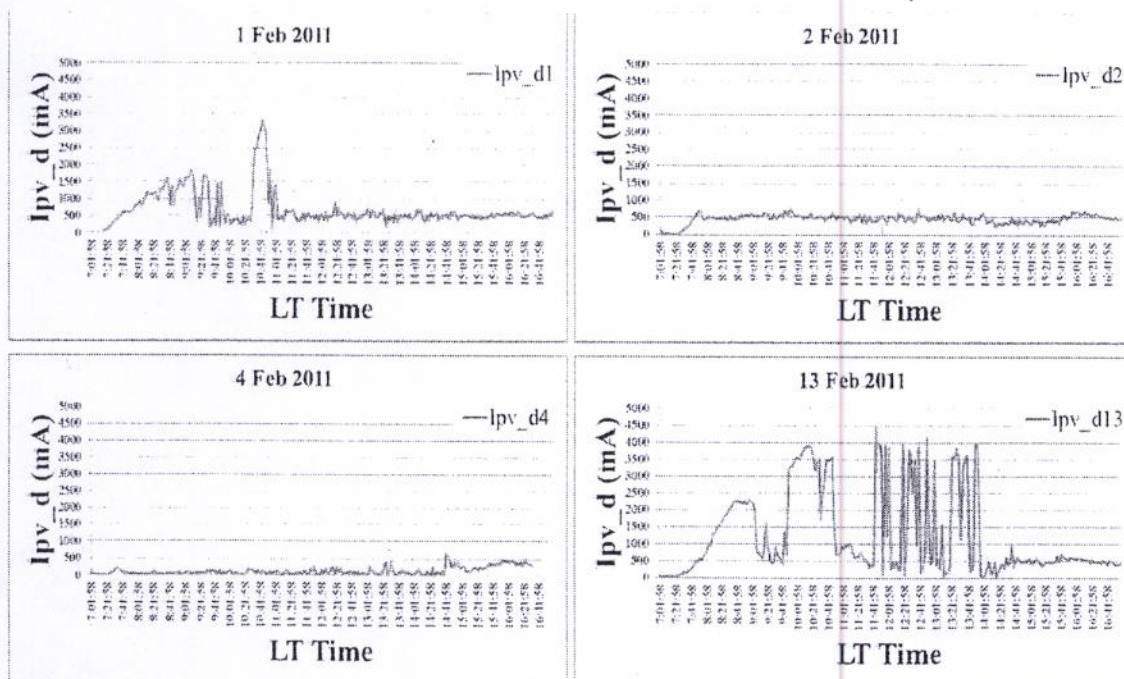


Fig. 3. Ipv_d of day 1st, 2nd, 4th, and 13th February 2011.

3. Discussion

Refer to the period of the experimental days, four weather conditions were observed as shown in Table 2. The investigations of four weather conditions were divided into two parts as shown below:

3.1. Clear sky day and Cloudy day without rain

Refer to the observed-weather condition on Table 2, the clear sky day were on 4th and 8th of February 2011. It was plausible to the low level Ipv_d with small fluctuations as shown in Figure 3 for 4th February 2011. Table 3 shows the average Ipv_d of each hour of both clear sky days and cloudy days without rain

on a period of experimental days. It is seen in Table 3 that the averages of the I_{pv_d} on 4th and 8th February 2011 were around 100 mA. These were agreed quite well with the observed-clear sky on those days. The I_{pv_d} could have low level close to the I_{pv_i} on the clear sky day. The low level of I_{pv_d} illustrated the fact that the solar cell could receive maximum intensity of the sunlight all day long. Only in clear sky day condition, the solar cell will receive maximum one.

Table 3. The I_{pv_d} with averaged every hour of 2nd, 3rd, 4th, 5th, and 8th February 2011.

Date	7-8 LT	8-9 LT	9-10 LT	10-11 LT	11-12 LT	12-13 LT	13-14 LT	14-15 LT	15-16 LT	16-17 LT	Average
Clear sky day											
Feb 4 th	61.22	40.76	73.05	77.74	72.64	106.43	117.11	183.29	272.45	-	111.63
Feb 8 th	143.42	280.48	104.26	91.08	103.14	105.95	107.54	96.42	99.60	65.81	119.77
Cloudy day without rain											
Feb 2 nd	224.99	490.81	561.73	511.65	446.06	493.45	482.86	361.82	431.58	562.33	456.73
Feb 3 rd	374.52	1302.40	774.44	662.81	471.60	462.58	269.48	425.12	567.16	615.67	529.58
Feb 5 th	-	438.44	540.69	536.23	509.68	455.50	311.56	227.37	266.62	369.83	406.21

According to Table 3, the I_{pv_d} on 2nd, 3rd, and 5th of February 2011 with average around 450 mA showed good agreement to the cloudy day without rain. It reflects to the fact that the current generated by the solar cell would be depended on the intensity of the sunlight. On the cloudy day without rain, the cloud covers all the sky and the intensity of the sunlight is small. Consequently the solar cell generates low I_{pv} . Thus, the computed I_{pv_d} showed high level around 450 mA. The result from Table 3 showed that the average I_{pv_d} on 3rd February 2011 of around 500 mA was larger than the averaged I_{pv_d} on both 2nd and 5th February 2011. From this evidence, it might be expected that the cloud on 3rd February 2011 could thick and dark more than the cloud on 2nd and 5th February 2011. It should be noted that the I_{pv_d} in the period of 8.00 LT to 9.00 LT on 3rd February 2011 was about 1302 mA. It is corresponding to the thick and wide cloud covering the sky of Bangkok area which can see from MTSAT-2 IR1 JMA satellite image on that day (<http://weather.is.kochi-u.ac.jp>). Figure 4 illustrated the comparison between the I_{pv_d} of the clear sky day on 4th February 2011 and the cloudy day without rain on 2nd February 2011. The average of difference between them is 342 mA. This difference confirmed that on the clear sky day, solar cell will generate high level of I_{pv} corresponding to the low level of I_{pv_d} . In the other hand, the I_{pv_d} of the cloudy day without rain will have higher level of I_{pv_d} than the I_{pv_d} of the clear sky day.

3.2. Cloudy day with rain and Rainy day

According to Figure 3, I_{pv_d} on the 1st February 2011 increased in a period of around 7.00 LT to 9.00 LT. It fluctuated from 9.00 LT to 10.00 LT and increased from 10.20 LT to 11.00 LT. The average I_{pv_d} on a period of 7.00 LT to 10.00 LT was around 900 mA. During the time 10.20 LT to 11.00 LT, the average I_{pv_d} was around 1600 mA. After 11.00 LT, the average I_{pv_d} was around 520 mA. These results could be plausible to our observation of weather condition on the 1st February 2011. It was the thick cloud and then rain in the morning section and it was cloudy again in the afternoon section. In addition, the MTSAT-2 IR1 JMA satellite image of the period from 7.00 LT to 11.00 LT also showed that the cloud covers the Bangkok and the central part of Thailand.

Figure 5 illustrated the comparison of I_{pv_d} between the clear sky day and the rainy day. It is clearly seen from Figure 5 that rain affects the generated current from solar cell. On 13th February 2011 we

observed that the first rain of the day started at around 8.00 LT and ended at around 9.00 LT, corresponding to the high level of I_{pv_d} in the period of 8.00 LT to 9.00 LT with its average of 1800 mA. The second rain started at around 9.40 LT and ended at around 10.40 LT, corresponding to the high level of I_{pv_d} in the period of 9.40 LT to 10.40 LT with its average of 3000 mA. The swing of drizzling rain and heavy rain appeared in the period of around 11.20 LT to 14.00 LT, corresponding to the fluctuation at the high level of I_{pv_d} in the period of 11.40 LT to 14.00 LT with its average of 1800 mA. The I_{pv_d} of the raining period on 13th February 2011 had high level and large fluctuation of I_{pv_d} in comparing to the I_{pv_d} of the clear sky day on 4th February 2011. It could be agreed with the fact that the sunlight can reflect and scatter by the raindrop. Then, the small intensity of the sunlight caused by the rain drop to the solar cell could reduce the current that generated by the solar cell. The I_{pv_d} on the clear sky day on 4th February 2011 had small fluctuation because it had no effect of the rain drop to the solar cell.

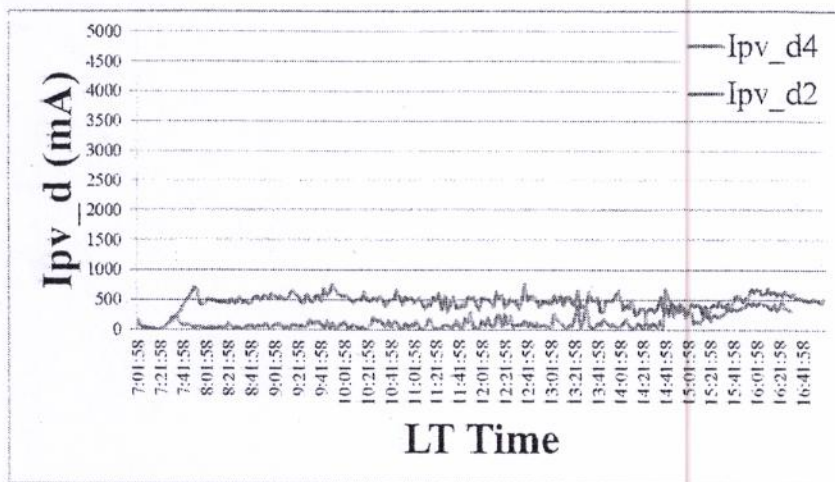


Fig. 4. Comparison of I_{pv_d} between 2nd and 4th of February 2011.

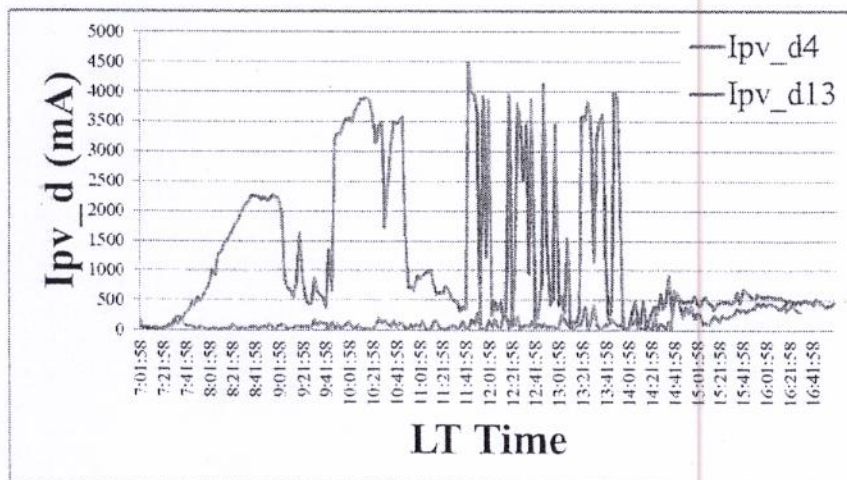


Fig. 5. Comparison of I_{pv_d} between 4th and 13th February 2011.

4. Conclusion

Electricity can be generated by the solar cell when the solar radiation is incident onto it. The amount of electric current depends on the intensity of the incident solar radiation. In daytime, the generated electric current is varied. It is caused by the varying of the intensity of the solar radiation. The variation of intensity of the incident solar radiation mainly comes from the cloud on the sky over the solar cells. This experiment illustrated that the using of the solar cell for daytime weather study could be conducted. The variation of I_{pv_d} might be plausible to the weather conditions. In the period of experiment days, the variation of I_{pv_d} showed good agreement with the daily weather conditions. For the clear sky day, the I_{pv_d} illustrated low level at around 100 mA. Otherwise, the I_{pv_d} at around 400 mA could be considered as the cloudy day without rain. The period of I_{pv_d} with high level more than 1600 mA might be considered as the raining period of the day. However, there are some developments still existed. For example, the range of the using of I_{pv} data was limited. The I_{pv} in early morning and late afternoon are very low. That means they cannot be used to study the daily weather via the method in this experiment. We need to investigate and find the solutions in the future studies.

Acknowledgements

This work is supported by the division of physics, faculty of Science and Technology, Rajamangala University of Technology Thanyaburi. The MTSAT-2 IR1 JMA satellite image data are obtained from Kochi University.

References

- [1] Anderson E. *Fundamentals of solar energy conversion*. MA: Addison-Wesley Pub. Co; 1985.
- [2] Kattakayam T n A, Khan S, Srinivasan K. Diurnal and environmental characterization of solar photovoltaic panels using a PC-AT add on plug in card. *Solar Energy Materials and Solar Cells*. 1996; **44**.p25-36
- [3] Goetzberger A, Luther J, Willeke G. Solar cells: past, present, future. *Solar Energy Materials & Solar Cells*, 2002; **74**. p 1–11
- [4] Zhong H, Li G, Tang R, Dong W. Optical performance of inclined south-north axis three-positions tracked solar panels. *Energy*.2011;**36**, p1171-1179
- [5] Li, Z., Liu, X., and Tang, R. Optical performance of vertical single-axis tracked solar panels. *Renewable Energy*. 2011;**36**.p 64-68.
- [6] Amin N, Lung C W, Sopian K. A practical field study of various solar cells on their performance in Malaysia. *Renewable Energy* 2009;**34**.p1939–1946
- [7] Omubo-Pepple V B, Israel-Cookey C, Alaminokuma G I. Effects of Temperature, Solar Flux and Relative Humidity on the Efficient Conversion of Solar Energy to Electricity. *European Journal of Scientific Research* 2009;**35** No.2,p.173-180
- [8] Kawamura H. et al. Simulation of I-V characteristics of a PV module with shaded PV cells. *Solar Energy Materials & Solar Cells* 2003; **75**.p 613–621

2-6-

EST MODUS IN REBUS

8851



SCImago
Journal & Country
Rank

Home

Journal Rankings

Journal Search

Country Rankings

Country Search

Compare

Map Generator

Help

About Us

Journal Search

Search query

☐ Exact phrase

Energy Procedia

Country: Netherlands

Subject Area: Energy

Subject Category: Energy (miscellaneous)

Publisher: Elsevier BV. Publication type: Conferences and Proceedings. ISSN: 18766102

Coverage: 2009-2011

H Index: 14

in - RADIOMBI 6 HOUR

Show this information in
your own website

Charts Data



Indicator	2004-2011	Value
SJR		0.09
Cites per doc		1.77
Total cites		1188

Display journal title

Just copy the code below and
paste within your html page:

``



How to cite this website?

SJR is developed by:

SCIMAGO
LAB

Powered by
SCOPUS™

SJR indicator vs. Cites per Doc (2y)

The SJR indicator measures the scientific influence of the average article in a journal, it expresses how central to the global scientific discussion an average article of the journal is. Cites per Doc. (2y) measures the scientific impact of an average article published in the journal, it is computed using the same formula that journal impact factor™ (Thomson Reuters).

Citation vs. Self-Citation

Evolution of the total number of citations and journal's self-citations received by a journal's published documents during the three previous years.

Abstract Book

9th Eco-Energy and Materials Science and Engineering Symposium

**Energy technology, Environmental
and Social Impact, Nanotechnology
and Material Technology, Energy
Economic and Management, Nuclear
Technology, New Technology and
Other topics related to energy field.**

**On May 25-28, 2011
Wiang Inn, Chiang Rai
Thailand**

Organized by



Sponsored by



International scientific advisory committee:

Chairperson:

Assoc.Prof.Dr.Namyoot Songthanapitak Thailand

Co-chairperson

Prof.Dr.Kiyoshi Yoshikawa Japan

Member:

Prof.Dr.Susumu Yoshikawa	Japan
Prof. Dr.Phadungsak Rattanadecho	Thailand
Prof.Dr.Shiro Saka	Japan
Prof. Dr.-Ing. habil. Ingo Stadler	Germany
Prof. Dr.Nipon TangTham	Thailand
Prof. Dr. Takeshi Yao	Japan
Prof. Dr. Masayoshi Okubo	Japan
Prof.Dr.Somchai Wongwises	Thailand
Prof. Dr.Young S. Chai.	Korea
Prof.Dr.Hideaki Ohgaki	Japan
Prof.Dr. Nadarajah Mithulananthan	Australia
Prof. Dr. Masayoshi Okubo	Japan
Prof. Dr. Yukio Ogata	Japan
Prof. Dr. Hitomi Ohara	Japan
Prof. Dr. Yuichi Anada	Japan
Dr. Sei-ichi Aiba	Japan
Assoc.Prof.Dr.Preecha P. Yupapin	Thailand
Assoc.Prof.Dr.Supakij Nontananandh	Thailand
Assoc.Prof.Dr. K. Srinivas Reddy	India
Assoc.Prof.Dr.Somsak Mitatha	Thailand
Assoc.Prof Kosin Chamnongthai	Thailand
Assoc. Professor Dr. David Jan Cowan	USA
Assoc. Prof. Dr. Per B Zetterlund	Australia
Assoc.Prof.Serm JanJai	Thailand
Assoc. Prof. Dr. Takashi Sagawa	Japan

International scientific advisory committee:

Assoc. Prof. Dr. Anchaleeporn Waritswat Lothongkum	Thailand
Assoc. Prof. Dr. Tawatchai Charinpanitkul	Thailand
Assoc. Prof. Dr. Pramoch Rangsunvijit	Thailand
Assist. Prof. Dr. Sonobe Taro	Japan
Asst. Prof. Dr. Sutham Niyomwas	Thailand
Asst. Prof. Dr. Boonyarach Kitiyanan	Thailand
Asst. Prof. Dr. Thammanoon Sreethawong	Thailand
Asst. Prof. Dr. Chanchai Thongpin	Thailand
Asst.Prof.Dr.Kesinee Pratumswan	Thailand
Asst.Prof.Dr.Yoshikazu Suzuki	Japan
Asst.Prof.Dr. Kulachate Pianthong	Thailand
Asst Professor. Dr. Sanya Sirivithayapakorn	Thailand
Asst Professor. Dr. Pongsak Noophan	Thailand
Asst.Prof.Dr.-Ing. Thanapong Suwanasri	Thailand
Asst.Prof.Dr. Phayung Meesad	Thailand
Asst.Prof.Dr.Somchai Prakanchaen	Thailand
Dr. Nguyen Minh Tan	Vietnam
Dr. Arthit Sode-yome	Thailand
Dr.Napaporn Phuangpornpitak	Thailand
Dr.Nirun Kongritti	Thailand
Dr. Surawut Chuangchote	Thailand
Dr. -Ing. Supakij Suttiruengwong	Thailand
Dr.Chanyud Kritsunankul	Thailand
Dr.Kullaya Saricheewin	Thailand
Dr.Thaneeya Perbangkhem	Thailand
Dr. Supachai Ngamsinlapasathian	Thailand

Application of Solar Cells for Daytime Weather Study

N. Choosakul, M. Buddhakala, N. Barnthip, A. Muakngam and C. Banglieng

Abstract— Solar cell is the instrument that can convert solar radiation into electricity. The electric current is generated by the solar cell when the solar radiation is incident onto the Solar cell. The intensity of the incident solar radiation can control the amounts of generated electric current. In daytime, the variation of intensity of the incident solar radiation mainly comes from the cloud over the solar cells. It caused the variation of generated electric current. This phenomenon serves the new way to use the solar call for meteorological purpose. In the period of experiment days, the results showed that the variation of generated electric current might be plausible to the daily weather condition. On the sunny day, the generated current was small fluctuation and has high level. Otherwise, a small fluctuation with low level one is appear in the cloudy day. On the raining period, the generated current could drop down more than 3000 mA in compare with the sunny period.

Keywords— Solar cell, weather, cloud, rainy day

1. INTRODUCTION

In recent year, many instruments, methods and techniques were applied to the used of solar energy. Solar cell is the one of them that can use to convert the solar energy into another energy form. Generally, the solar radiation, which is incident onto the solar cell, generates the electric current [1]. The total of electricity that solar cell can produce are mainly depend on the intensity of the incident solar radiation (e.g. [2],[3],[4]and [5]) It is well known that there are several features affecting the performance of the solar cell such as effect of cloud and rain [6]. The generated current from solar cell is small when cloudy and the rainy day. For the solar cell engineering, there are set to be "the noise" of the solar cell used. In the other hand, the reducing current one is become "the meteorological signal" for meteorological study.

In this paper, we demonstrated the simply way and method to use the solar cell for meteorological study. The experiment was set to study the relationship between clouds over the solar cells and the generated electric current.

2. OBSERVATIONS AND RESULTS

The solar cell was installed on the top of the faculty of Science and Technology building, Rajamangala University of Technology Thanyaburi where is no any shadow effect to the solar cells, as shown in Figure 1. The Solar panel consists of eight of solar modules, which provide the power of around 1 kW. The specification of each solar module is shown in Table 1.

Sunny Data control is a computer programe. It was installed to monitor the solar cell. All of informations from the solar cell were recorded and stroged in the monitoring server with sampling rate of 24 data per hour.

In this experiment, we used the data of direct current gennerated by solar cell (Ipv) in unit of mA. The Ipv was generated when the sun light incident onto the solar cell. [7] and [8] suggests that the amount of direct current from the solar panels can produce is directly dependent on the level of light they receive. In full, bright sunlight, solar panels receive maximum levels of light. During those peak sunlight hours, the solar panel will produce the maximum current, consecutively.

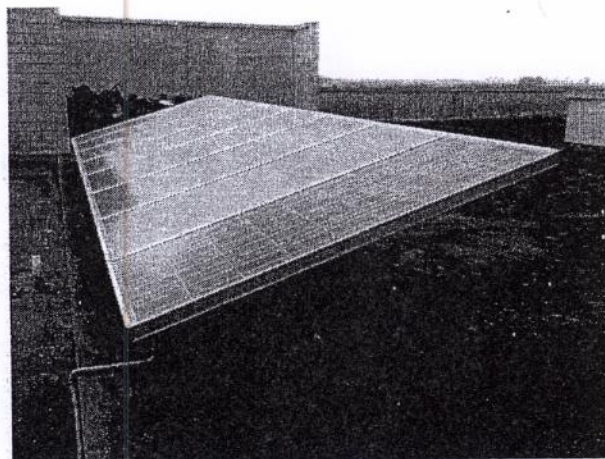


Figure 1 The Solar panel

Table 1. The specification of solar module

Solar moule	Detail
Name	Sharp Solar Module ND-130T1J
Maximun Power	130.0 W
Open-circuit Voltage (Voc)	22.0 V
Short-circuit Current (Isc)	8.09A
Voltage at point of	
Maximum power (Vmpp)	17.4 V
Current at point of	
Maximum power (Impp)	7.48 A
Maximum system voltage	600 V
Over-current protection	15 A

N. Choosakul, M. Buddhakala, N. Barnthip, A. Muakngam and C. Banglieng are with the Department of Physics, Faculty of Science and Technology, Rajamangala University of Technology Thanyaburi, Klong 6, Thanyaburi, Pathumthani 12110, Thailand, E-mail: cnwatthn@hotmail.com

We used the Ipv data from 1 February 2011 to 14

February 2011. The data of each day was started around 7.00 Local time (LT) and ended of operating time around 17.00 LT. Total observational time per day is around 10 hours corresponding to the number of data per day of 240 data. Figure 2 is an example of Ipv data in the period of operating time. Figure 2 showed the Ipv of 2nd February 2011. The Ipv slightly increase in the morning section. The maximum Ipv was about 6000 mA at around 12.10 LT. Finally, Ipv slightly decreased in the afternoon section.

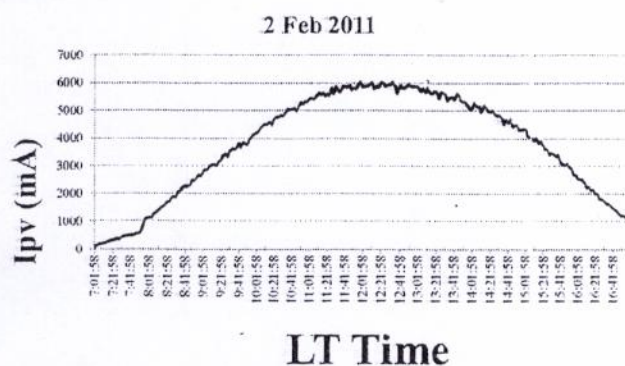


Figure 2 Ipv on 2 Feb 2011

In the period of 14 days of this experiment, we found four different of the daily weather condition; 1) The clear sky day, 2) the cloudy day without rain, 3) the cloudy day with rain, and 4) the rainy day. Table 2 showed the daily weather condition of all 14 experimental days.

Table 2 the daily weather condition of all 14 experimental days

Daily weather condition	Date
1) The clear sky day	4 and 8 Feb 2011
2) the cloudy day without rain	2, 3, and 5 Feb 2011
3) the cloudy day with rain	1,6,10, and 11 Feb 2011
4) the rainy day.	7,9,12,13, and 14 Feb 2011

Ipv of the clear sky days was used to make a reference index data (Ipv_i) by using smooth running average method with 15 points of window data. Finally, the index data were used to created the difference Ipv (Ipv_d) by subtracting the index data with daily Ipv data as show by equation 1 below;

$$\text{Ipv}_d = \text{Ipv}_i - \text{Ipv} \quad (1)$$

Figure 3 showed the plotted of Ipv_d of day 1, 2, 4, and 13 February 2011. The 1 February 2011 was under to the daily weather condition 3. The 2 February 2011 was under to daily weather condition 2. The 4 February 2011 was under to the daily weather condition 1. The 13 February 2011 was under to the daily weather condition 4.

3. DISCUSSION

According to the Figure 3, Ipv_d on the 1 February 2011 increased in a period of around 7.00 LT to 9.00 LT.

It fluctuated from 9.00 to 10.00 and increased from 10.20 LT to 11.00 LT. It was plausible to the observation of daily weather condition on the 1 February 2011 that was the day with rain in the morning section and cloudy in the afternoon section. To investigate in detail, the comparisons of Ipv_d were conducted. Figure 4 illustrated that the comparison of Ipv_d between the clear sky day and the cloudy day without rain. The average of difference between them is 342 mA. These difference showed to the fact that the current that generated by the solar cell would be depended on the intensity of the sunlight. On the clear sky day, solar cell will generate high level of Ipv with correspond to the low level of Ipv_d of that day. In the other hand, the Ipv_d of the cloudy day without rain will have higher level of Ipv_d than the Ipv_d of the clear sky day.

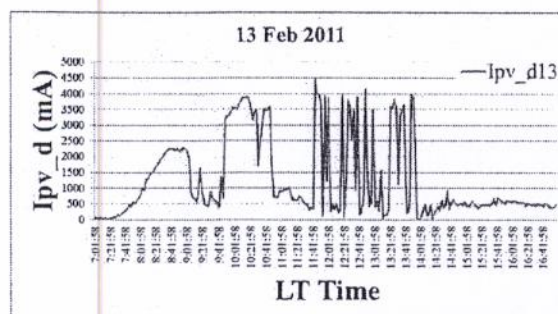
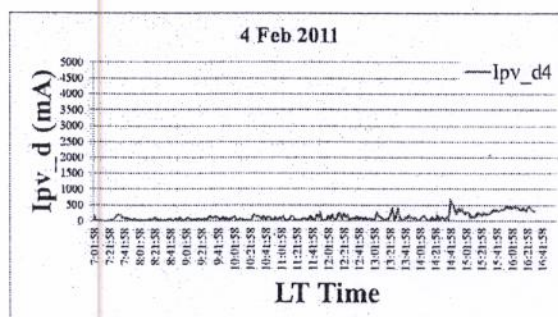
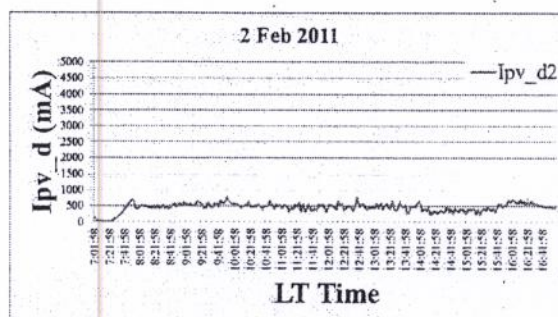
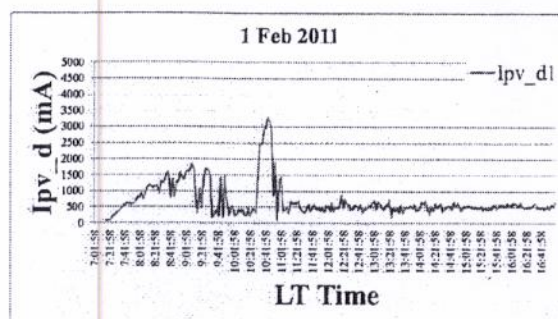


Figure 3 Ipv_d of day 1, 2, 4, and 13 Feb 2011

Figure 5 illustrated that the comparison of Ipv_d between the Clear sky day and the rainy day. The average